

Digital Time Switch

SEH62.1

Digital time switch used to switch plant on and off, or for the control of setback periods at night or at weekends.

- Integrated countdown timer
- Suitable for mounting on DIN rail
- Simple programming with large and easy - to-understand LCD
- Manual on/off control
- Quick Daylight Saving (DS) adjustment
- Backup of 72 hours

Functions

The microprocessor automatically stores the programmed times in chronological order.

The time switch operates in one of 4 modes:

- Manual continuously on
- Manual continuously off
- Adjustable count down timer on, or
- Automatic operation via the time program

A switch with momentary contact closure across M-D1 activates the countdown timer.


The power supply is buffered by a memory backup capacitor. In the event of a power failure, the time switch will continue to run, with the program retained, for 72 hours.

However, the relay will assume (or remain in) the normal position.

Programming

The SEH62.1 allows up to 8 programmed on/off periods. Each of these periods can be assigned to a single day or blocks of days as displayed on screen.

LCD

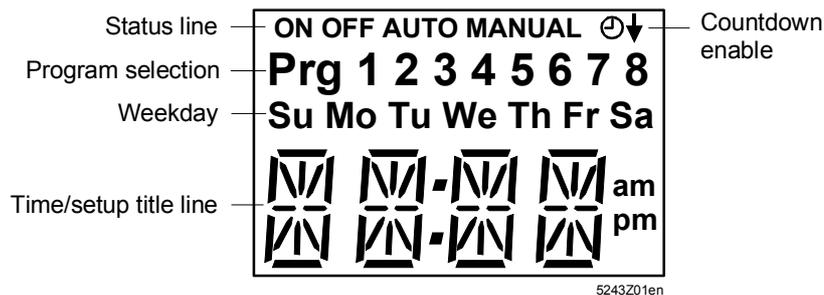

Operating buttons

The controller has 3 operating buttons for the following functions:

SEL

The SEL button is used to enter or save the settings. This button also acts as a manual on/off button.

+

The + / - buttons are used for selecting and adjusting parameters.

-

The screen will default back to the main screen if no entry is made for 60 seconds while in setting mode.

For more detailed information about technical features and functions, please refer to the Installation Instructions CE2G5243X.

Engineering notes

Use

Use this time switch only for applications as described in the description on the title page (bold print) and the section "Function". Additionally, observe all conditions and restrictions imposed in this section and in "Technical data".



The sections marked with a warning symbol contain technical safety requirements and restrictions. Observe all of these warnings as they relate directly to the protection of personnel and equipment.

Installation notes

Mounting

Although the microprocessor is protected, unusually strong electromagnetic fields could cause interference.

To avoid interference:

- The device should not be installed close to inductive components
- Inductive components must be fitted with interference suppressors (varistor / RC unit)
- 2 mounting holes are provided for surface-mounting

Environment

- The connection terminals must be freely accessible
- Ensure adequate air circulation to dissipate the heat generated during operation


The SEH62.1 can be mounted as follows:

Observe all local installation and mounting regulations.

- A On a DIN rail (EN 50 022-35 x 7.5) of least 60 mm length
- B Wall mounted with 2 screws
- C Front mounted using standard elements.
E.g. 1 x DIN rail 100 mm long 2 x hexagonal spacers 50 mm, washers and screws
- D In an ARG62.22 protective housing together with other devices



The SEH62.1 is for indoor use and must have all terminals well protected by a plastic cover or in a panel/enclosure.

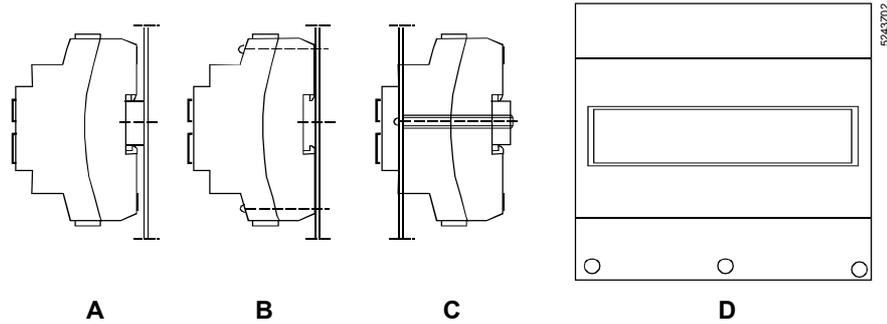

Electrical installation



The SEH62.1 is designed for AC 230 V supply voltage.

There must be a minimum of 8 mm clearance between the terminals and the panel/enclosures in order to avoid electric shock. Under no circumstances should the front cover of the time switch be removed.

All local safety regulations must be observed.

Technical data

General data

Power supply

Operating voltage AC 230 V –15...+15 %

Frequency 50/60 Hz

Power consumption 3.0 VA

Environmental conditions

Operation to IEC 721-3-3

Climatic conditions class 3 K5

Temperature 0...+50 °C

Humidity <95 % r.h.

Transport to IEC 721-3-2

Climatic conditions class 2 K3

Temperature –25...+70 °C

Humidity <95 % r.h.

Mechanical conditions class 2M2

Storage to IEC 721-3-1

Climatic conditions class 1K3

Temperature –25...+70 °C

Humidity <95 % r.h.

Norms and standards

conformity to

EMC directive 89/336/EEC

Low-voltage directive 73/23/EEC

N474 C-Tick conformity to

EMC emission standard AS/NSZ 4251.1:1994

Product standards

Automatic electrical controls for household and similar use EN 60 730 - 1

Particular requirements for timers and time switches EN 60 730 - 2 - 7

Electromagnetic compatibility

Emissions EN 50 081-1


Immunity EN 50 082-1

Devices of safety class II to EN 60 730

Degree of protection of housing IP 20 to EN 60 529

	Color of housing	top light gray (RAL7035) bottom silver-gray (RAL 7001)
Terminals	Screw terminals for cables with	min. 0.5 mm dia. max. 2 x 1.5 mm ² or 2.5 mm ²
Functional data		
Time clock	Time basis	quartz
	Memory locations	8 for 7-day clock, with grouping into 13 different blocks of days for 24-hour clock
	Minimum switching interval	1 min
	Backup	nominal 72 hours after 24 hours of operation
	Accuracy	± 1 s / day at 20 °C
	Display	40 mm LCD
Digital input D1	Polling voltage for control commands (D...M)	DC 24 V
	Current draw	8 mA
	Required input	momentary contact closure
Signal output Q	Relay contacts (potentialfree)	
	Voltage	AC 24...240 V
	Contact rating	max. 6 A resistive max. 3 A inductive
Weight	Weight including packaging	0.3 kg

Internal diagram

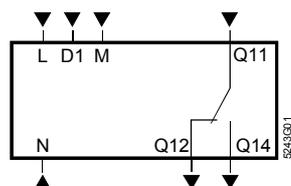

L, N Input AC 230 V
M, D1 Digital input (momentary contact closure)
Q... Digital output, various voltages permissible (AC 24...230 V)

Dimensions

